

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
17 June 2004 (17.06.2004)


PCT

(10) International Publication Number  
**WO 2004/051602 A1**

- (51) International Patent Classification<sup>7</sup>: **G09B 23/28** (74) Agent: **STRÖM & GULLIKSSON IP AB**; Sjöporten 4, S-417 64 Göteborg (SE).
- (21) International Application Number: **PCT/SE2003/001891** (81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE, EG, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, JS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 3 December 2003 (03.12.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
0203568-1 3 December 2002 (03.12.2002) SE  
60/430,345 3 December 2002 (03.12.2002) US
- (71) Applicant (*for all designated States except US*): **MEN-TICE AB** [SE/SE]; Kaserntorget 6, S-411 18 Göteborg (SE).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): **OHLSSON, Fredrik** [SE/SE]; Fyrskeppsvägen 21, S-423 40 Torslanda (SE).
- (84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,

[Continued on next page]

(54) Title: AN INTERVENTIONAL SIMULATION DEVICE

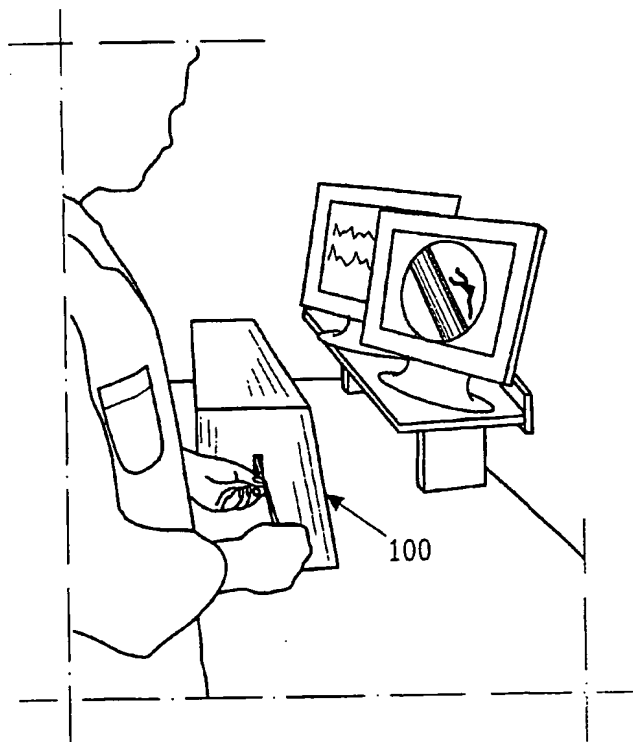

(57) Abstract: The present invention relates to a device (100) in a simulation system for simulating an interventional operation. The device (100) is arranged to receive a number of real instruments, preferably at least two. The device (100) comprises a number of moveable carriages (16A-16C) corresponding to the number of the real instruments. The device (100) further comprises a track (20) and an interconnecting member (26). The interconnecting member (26) interconnects the carriages (16A-16C) serially. Each carriage (16A-16C) is provided with an opening for enabling reception of the instruments. Each carriage (16A-16C) further comprises members to receive and lock at least one instrument, and members for receiving a movement from the instrument and generating a force, fed back to the instrument with respect to a simulation characteristic.

WO 2004/051602 A1

SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments